


Motive Power Block Batteries Valve Regulated Lead Acid AGM-type AF Range

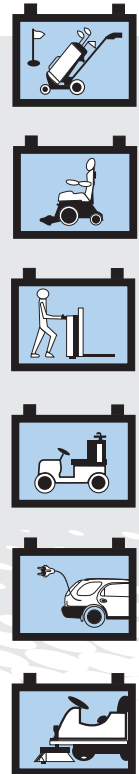

Main technical features and benefits

- Good High Power Performance
- Maintenance-free (no topping up), valve regulated battery with electrolyte being immobilized using a Glass Micro fiber mat
- Low Self Discharge
- Safe
- Product Range:
6V and 12V Block Batteries
12 Ah up to 195 Ah (C₅)
14 Ah up to 220 Ah (C₂₀)
- 350 Cycles according IEC 254-1

Applications

The AF range of blocks are particularly suitable for light use. This includes applications for wheel chairs,


golf carts and for the fast material flow in walkies and in many other applications of traction.

AGM – Motive Power Block Batteries AF Range (VRLA)

Technical characteristics and data


Type	Nominal voltage	Nominal capacity	Nominal capacity	Length (l)	Width (b/w)	Height (h)	Weight	Terminal	Terminal position
	V	C ₅ Ah	C ₂₀ Ah						
AF 06 195 X O	6	195	220	306	174	224	30.5	F-M6	1
AF 12 012 Z S	12	12	14	150	97	100	4.0	SR-6.3	4
AF 12 017 Z G	12	17	19	180	76	167	6.0	G-M6	3
AF 12 026 Z G	12	26	29	175	166	125	9.1	G-M6	3
AF 12 032 Z T	12	32	35	196	131	172	13.0	F-M5	2
AF 12 040 Z O	12	40	45	197	166	175	16.0	F-M6	3
AF 12 060 Z O	12	60	65	260	166	190	21.7	F-M6	2
AF 12 080 X O	12	80	92	260	174	224	25.0	F-M6	2
AF 12 095 X O	12	95	110	306	174	224	29.5	F-M6	2

Drawings with terminal position terminal and torque

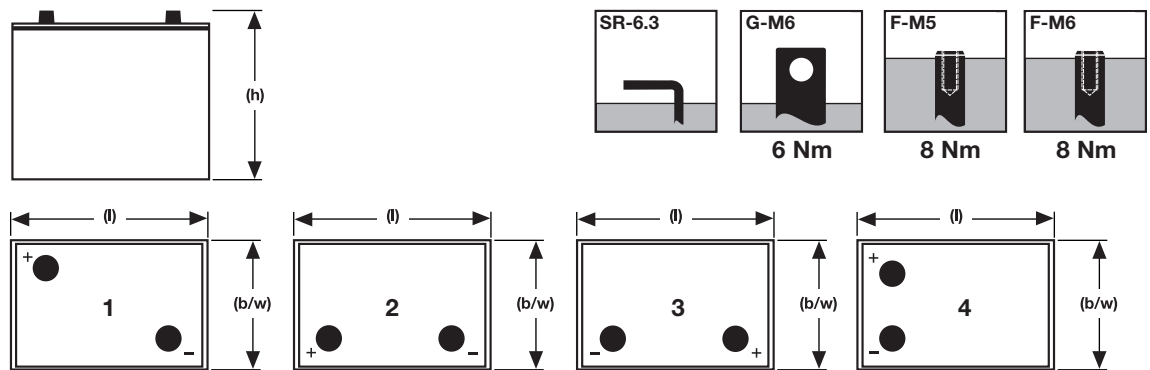

Not to scale!

Specifications

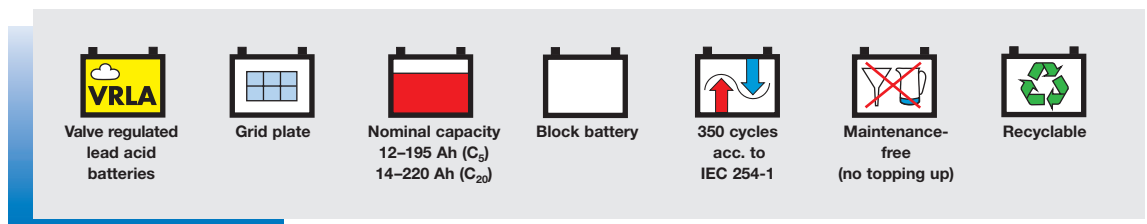

Deutsche EXIDE GmbH
Im Thiergarten
63654 Büdingen – Germany

Tel.: +49 (0) 60 42 / 81 454
Fax: +49 (0) 60 42 / 81 398

www.motivepower-eu.com